


Module No. 588


READING THE DISPLAY

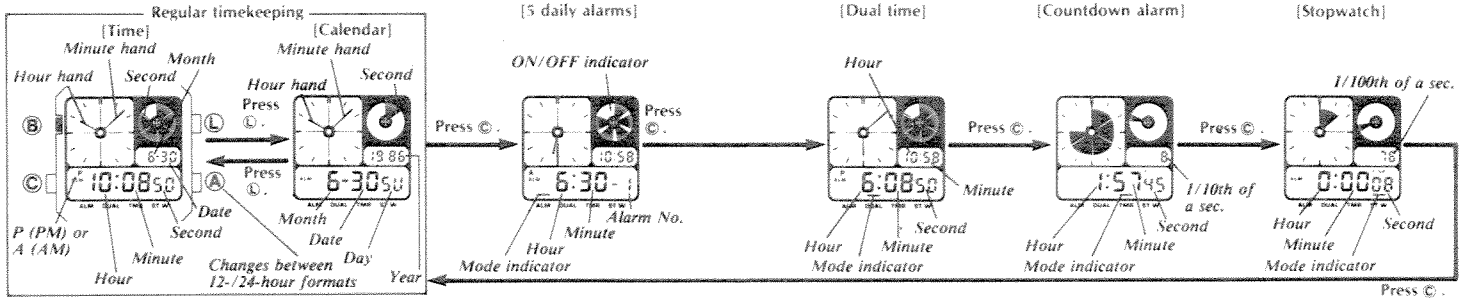

(Reversion to regular time) The watch reverts to regular timekeeping when the © button is pressed after operation.

(Auto-retrieve function) The watch, if left unused, will automatically return to regular timekeeping in a few minutes.


SETTING TIME AND CALENDAR

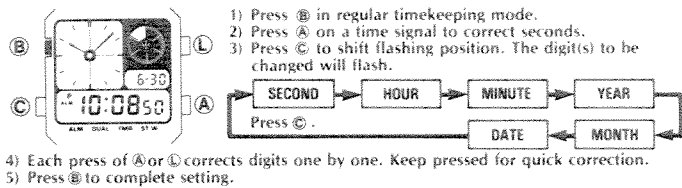

SETTING DUAL TIME

- 1) Press ⓑ in the dual time mode
 - 2) Each press of ⓐ or ⓑ corrects flashing digits one by one. Keep pressed for quick correction.
 - 3) Press © to shift flashing position. The digit(s) to be changed will flash.
 - 4) Press ⓑ to complete setting.
- * The ⓐ button changes 12-/24-hour formats.

FIVE DAILY ALARMS

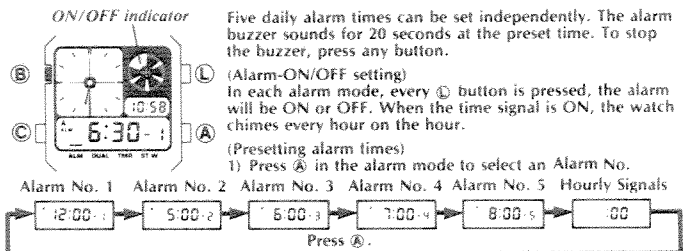

COUNTDOWN ALARM OPERATION

The countdown can be set from one minute to 24 hours (Display shows 0:00), and times to an accuracy of 1/10th of a second. Start/stop operation is possible by pressing the ⓐ button and is confirmed by a signal. When the display reaches zero, the buzzer will sound for 10 seconds unless any button is pressed.

(Repeat function) When the display reaches zero, the pre-entered time is retrieved automatically.

(Pre-entering countdown alarm time)

- 1) Press ⓑ to set new countdown alarm time.
- 2) Each press of ⓐ or ⓑ corrects flashing digits one by one. Keep pressed for quick correction.
- 3) Press © to shift flashing position. The digit(s) to be changed will flash.
- 4) Press ⓑ to complete setting.

STOPWATCH OPERATION

